

PORTABLE ELECTROMAGNETIC DRILL & TAPPING MACHINE



A-22 Portable Magnetic Drill Machine



A-25 Portable Magnetic Drill Machine



A-22N Portable Magnetic Drill Cutting Machine




A-25N Portable Magnetic Drill Cutting Machine



A-22NS
Portable Magnetic Drill & Cutting & Tapping Machine



A-25NS
Portable Magnetic Drill & Cutting & Tapping Machine

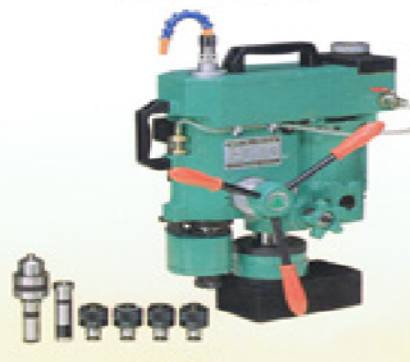

A-22S
Portable Magnetic Drill & Tapping Machine



A-25S
Portable Magnetic Drill & Tapping Machine



FM-50G Portable Magnetic Cutting Unit

- This machine table has devised with 2 R. P. M. for free choice of the operator.
- Perforator's collet set, tapper set, and driller's handle set are designed with rapid adapter for high-speed replacement to increase the working efficiency.
- If it is required by the user, this machine table is devised with three functions for drilling, tapping, and perforating. For outgoing work, the various tables are unnecessary to bring with for convenient purpose.
- It is most suitably, used for general heavy-duty machine or workpiece to be moved difficultly, such as: production of machine tools, steel skeleton of high building, H-type steel, big steel plate, and steam furnace, etc, drilling and tapping operation.

MODEL	A-22	A-25	A-22N	A-25N	A-22S	A-25S	A-22NS	A-25NS	FM-50G
POWER (AC)	110V-120V50/60HZ 220V-240V50/60HZ	110V-120V50/60HZ 220V-240V 50/60HZ	110V-120V50/60HZ 220V-240V50/60HZ	110V-120V50/60HZ 220V-240V50/60HZ	110V-120V50/60HZ 220V-240V50/60HZ	110V-120V50/60HZ 220V-240V50/60HZ	110V-120V50/60HZ 220V-240V50/60HZ	110V-120V50/60HZ 220V-240V50/60HZ	110V-120V50/60HZ 220V-240V50/60HZ
MOTOR RATED QUTPUT	1350W 1350W	1350W 1350W	1350W 1350W	1350W 1350W	1350W 1350W	1350W 1350W	1350W 1350W	1350W 1350W	1350W 1350W
MOTOR RATED AMPERE	12A 6.5A	12A 6.5A	12A 6.5A	12A 6.5A	12A 6.5A	12A 6.5A	12A 6.5A	12A 6.5A	12A 6.5A
R.P.M.	300 750 300 750	300 750 300 750	300 750 300 750	300 750 300 750	300 750 300 750	300 750 300 750	300 750 300 750	300 750 300 750	300 750 300 750
DRILLING CAPPACITY	2-22mm 1/16"~7/8"	2-25mm 1/16"~1"	2-22mm 1/16"~7/8"	2-25mm 1/16"~1"	2-22mm 1/16"~7/8"	2-25mm 1/16"~1"	2-22mm 1/16"~7/8"	2-25mm 1/16"~1"	
DRILLING TRAVEL	82mm 3-1/4"	82mm 3-1/4"	82mm 3-1/4"	82mm 3-1/4"	82mm 3-1/4"	82mm 3-1/4"	82mm 3-1/4"	82mm 3-1/4"	
HOLE CAPACITY	-	-	16/40mm 5/8"-1-9/16"	16-50mm 5/8"-1-31/32"	-	-	16/40mm 5/8"-1-9/16"	16-50mm 5/8"-1-31/32"	16-50 5/8"-1-31/32"
TAPPING CAPACITY	-	-	-	-	8-16mm 5/16"-5/8"	10-20mm 3/8"-3/4"	8-16mm 5/16"-5/8"	10-20mm 3/8"-3/4"	
BADY MOVABLE SIZE	100mm 3-15/16"	100mm 3-15/16"	100mm 3-15/16"	100mm 3-15/16"	100mm 3-15/16"	100mm 3-15/16"	100mm 3-15/16"	100mm 3-15/16"	
TURHING DEGREE	180"	180"	180"	180"	180"	180"	180"	180"	
TRANSVERSAL MOVE	10mm	10mm	10mm	10mm	10mm	10mm	10mm	10mm	
MAGNETIC	105x180x70m m	110x200x95	100x200x77	110x200x95	105x180x70	110x200x95	100x200x77	110x200x95	110x200x86
MAGNETIC FORCE	900KGS	1500kgs	1200kgs	1500kgs	900kgs	1500kgs	1200kgs	1500kgs	1200kgs
HEIGHTH	460m/m	490m/m	460m/m	490m/m	460m/m	490m/m	460m/m	490m/m	460m/m
WEIGHT	27	32	27	32	27	32	27	32	25