


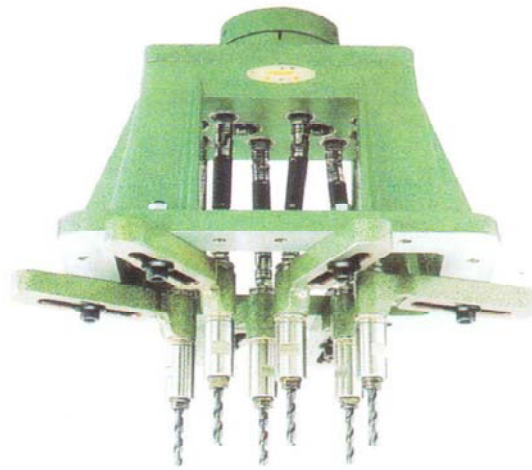

Type	Chuck Size	Transfer ratio	Maximum drilling capacity	The minimum distance (between the two axis)	Maximum distance (between the two axis)	Axes
U-100 * 165	C-5	1:1	5.0	13	100 * 165	3-8 axis
	C-6	1:1	6.0	18		
	C-9	1:1	8.0	26		
U-120 * 200	C-6	1:1	6.0	18	120 * 200	4-12 axis
	C-9	1:1	8.0	26		
	C-12	(Strong)	11	28		
U-120 * 300	C-6	1:1	6.0	18	120 * 300	4-14 axis
	C-9	1:1	8.0	30		
	C-12	(Strong)	11	30		
U-160 * 450	C-6	1:1	6.0	18	160 * 450	6-14 axis
	C-9	1:1	8.0	30		
	C-12	(Strong)	11	30		
U-170 * 300	C-6	1:1	6.0	18	170 * 300	6-14 axis
	C-9	1:1	8.0	30		
	C-12	(Strong)	11	30		
U-220 * 360	C-6	1:1	6.0	18	220 * 360	6-14 axis
	C-9	1:1	8.0	30		
	C-12	(Strong)	11	30		
U-270 * 300	C-6	1:1	6.0	18	270 * 300	6-14 axis
	C-9	1:1	8.0	30		
	C-12	(Strong)	11	30		
U-270 * 450	C-6	1:1	6.0	18	270 * 450	6-14 axis
	C-9	1:1	8.0	30		
	C-12	(Strong)	11	30		