


# 空油壓多段自動進退刀退屑鑽孔動力頭


Air-Hydraulic Multi-stage Automatic Drilling and discharge chip Head



PH-50-100H 最大鑽孔能力：Φ10mm

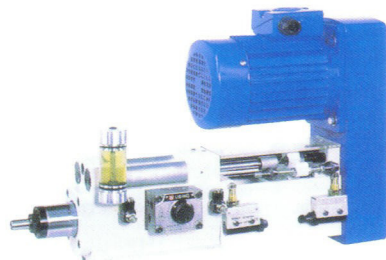


| 規格                      | Specification                      | PH-50-100H                                      |
|-------------------------|------------------------------------|-------------------------------------------------|
| 最大鑽孔能力 AL               | Max. Drilling Capacity             | Φ10mm                                           |
| 主軸行程                    | Spindle Travel                     | 100mm                                           |
| 主軸轉速                    | Spindle Speed                      | 830, 1670, 2500(50Hz)<br>1000, 2000, 3000(60Hz) |
| 馬力 HP                   | Motor HP                           | 1HP                                             |
| 標準壓力 kg/cm <sup>2</sup> | Pneumatic Power Kg/cm <sup>2</sup> | 5-7Kg/cm <sup>2</sup>                           |

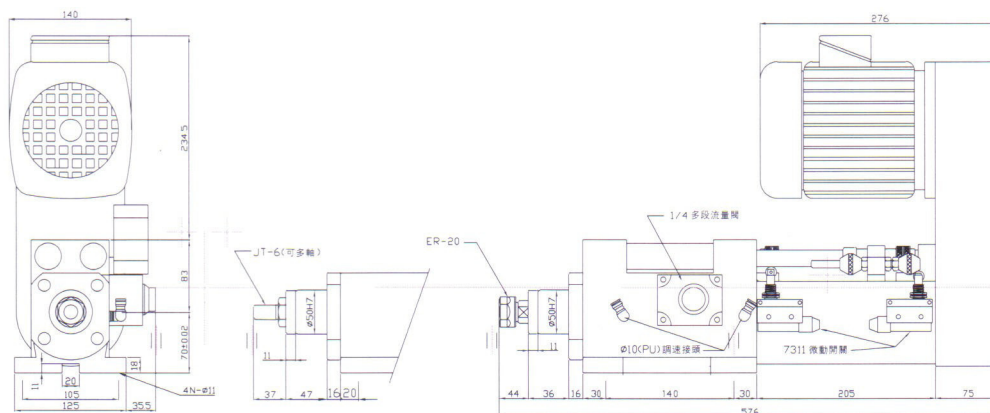


# 導螺杆攻牙動力頭

Lead Screw Tapping Head

T-140H 最大攻牙能力：M30

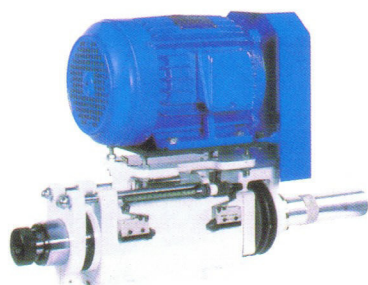

| 規格          | Specification         | T-140H         |
|-------------|-----------------------|----------------|
| 最大攻牙能力 S45C | Max. Tapping Capacity | M30            |
| 主軸行程        | Spindle Travel        | 140mm          |
| 主軸轉速        | Spindle Speed         | Optional/客戶指定  |
| 主軸傳動        | Spindle Transmission  | Lead screw/導螺杆 |
| 馬力 HP       | Motor HP              | 3HP            |

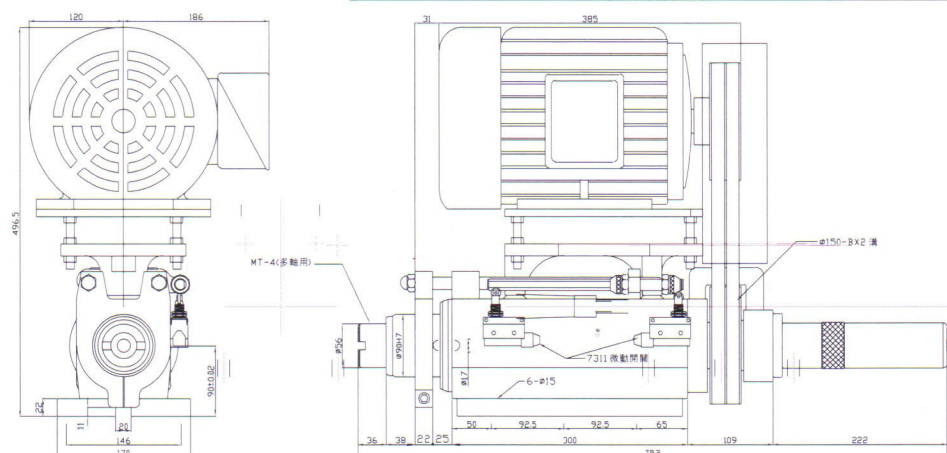

\* 型錄之規格如有變更，恕不另行通知。